



# **Supercookor<sup>®</sup>** **High Capacity** **Continuous Cooker**

**The most durable and efficient  
cooker available for continuous  
rendering applications.**

**Up to 4,400 square feet of  
heat transfer surface.**



- The heart of the Dupps Continuous Rendering System, the Supercookor mixes as it heats to produce a highly uniform product.
- End-point temperature and operating level are easy to control, while low agitator rpm provides gentle cooking action.
- A full-length vapor dome offers more area for vapor release, allows less entrainment and better cooking—plus easy shaft access for simple inspection and maintenance.
- Proven durability thanks to a recirculating oil system, heavy-walled tubes and shaft construction that exceeds A.S.M.E. Code.
- Full-length underframe with rigid drive mounting; direct-coupled gearing. Options include vacuum and stainless steel construction.

# Supercookor<sup>®</sup>

## High Capacity Continuous Cooker

The most durable and efficient  
cooker available for continuous  
rendering applications.



Up to 4,400 square feet of  
heat transfer surface.



Shown with Drainor, Sedimentor,  
and Control Wheel.



End view of tube-type  
Supercookor shaft.

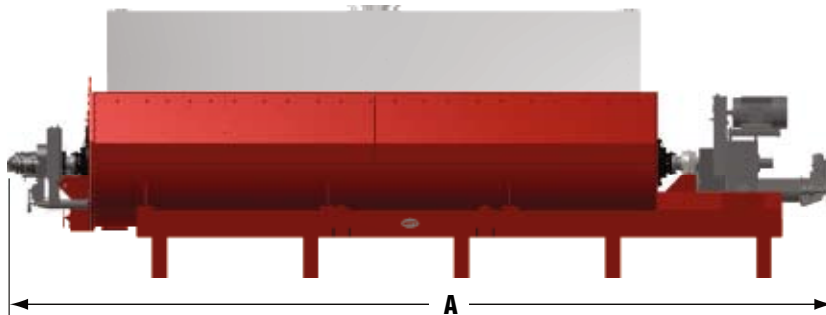

Model	A - Length	B - Height	C - Width	Weight	Avg. Evaporation
70U	9,487 mm • 31' 2"	3,429 mm • 11' 3"	1,930 mm • 6' 4"	24,000 kg • 53,000 lbs	2,363 kg/hr • 5,250 lbs/hr
90U	10,922 mm • 35' 10"	3,683 mm • 12' 1"	2,057 mm • 7' 11"	30,800 kg • 68,000 lbs	3,038 kg/hr • 6,750 lbs/hr
120U	13,157 mm • 43' 2"	3,683 mm • 12' 1"	2,057 mm • 7' 11"	37,100 kg • 82,000 lbs	4,050 kg/hr • 9,000 lbs/hr
160U	12,452 mm • 40' 10"	3,874 mm • 12' 9"	2,591 mm • 8' 6"	45,400 kg • 100,000 lbs	5,400 kg/hr • 12,000 lbs/hr
200U	13,976 mm • 45' 10"	3,874 mm • 12' 9"	2,591 mm • 8' 6"	50,800 kg • 112,000 lbs	6,750 kg/hr • 15,000 lbs/hr
220U	13,970 mm • 45' 10"	4,166 mm • 13' 8"	2,794 mm • 9' 2"	65,800 kg • 145,000 lbs	7,425 kg/hr • 16,500 lbs/hr
260U	13,818 mm • 45' 4"	4,496 mm • 14' 9"	3,023 mm • 9' 11"	83,500 kg • 184,000 lbs	8,775 kg/hr • 19,500 lbs/hr
320U	15,367 mm • 50' 5"	4,496 mm • 14' 9"	3,023 mm • 9' 11"	99,300 kg • 219,000 lbs	10,800 kg/hr • 24,000 lbs/hr
380U	17,450 mm • 57' 3"	4,801 mm • 15' 9"	3,353 mm • 11' 0"	119,300 kg • 263,000 lbs	12,825 kg/hr • 28,500 lbs/hr
440U	19,279 mm • 63' 3"	4,801 mm • 15' 9"	3,353 mm • 11' 0"	133,800 kg • 295,000 lbs	14,850 kg/hr • 33,000 lbs/hr

Height above floor is based upon installation requirements.

Due to ongoing product improvements, data shown here is subject to change without notice.

**The Dupps Company**



Germantown, Ohio U.S.A.

Phone: 937/855-6555

Fax: 937/855-6554

E-mail: info@dupps.com

Visit [www.dupps.com](http://www.dupps.com) to explore the  
world's leading protein recycling systems,  
equipment and service.

© 2013 The Dupps Company Printed in U.S.A.